


Type FF - FloorFast®


An innovative fixing for connecting chequer plate flooring to supporting steelwork. The stepped clamping face locks under the steelwork to provide a secure connection.

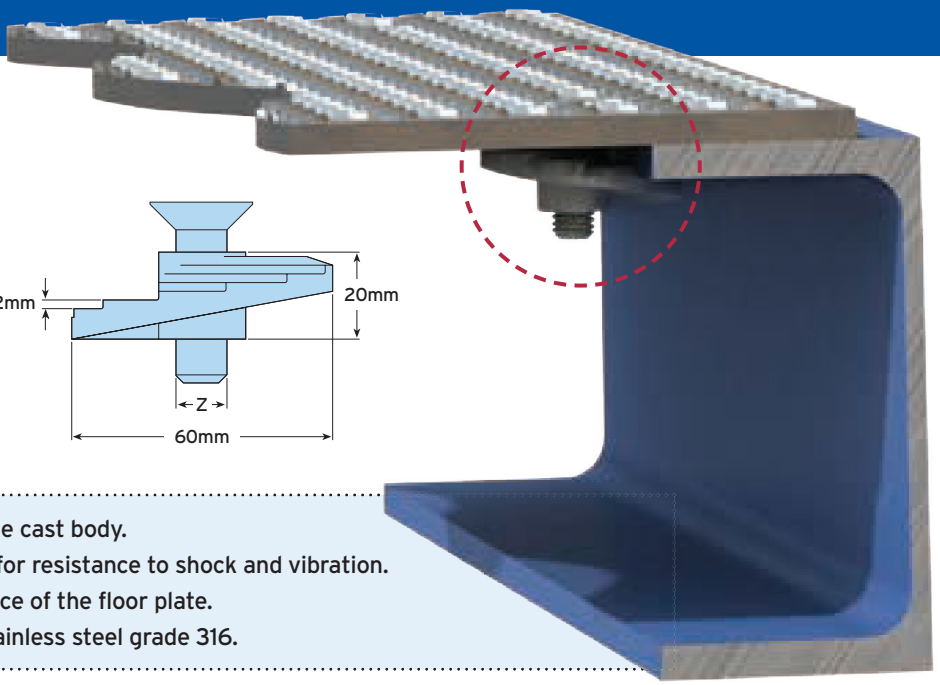



- Superior clamping force from the cast body.
- Lloyd's Register Type Approval for resistance to shock and vibration.
- Zero protrusion above the surface of the floor plate.
- Available in malleable iron or stainless steel grade 316.

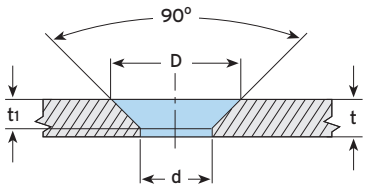

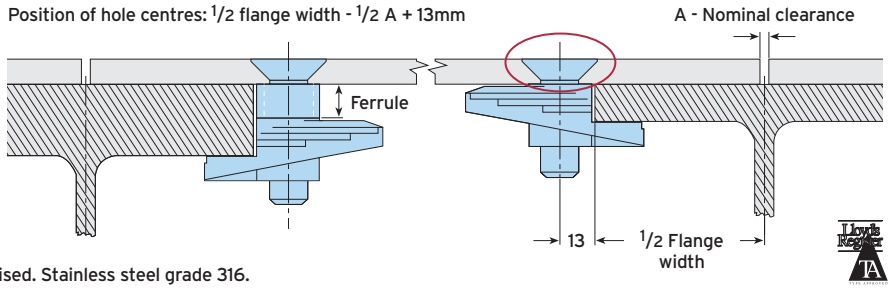


Material: Malleable iron, zinc plated / hot dip galvanised. Stainless steel grade 316.

Code	Bolt min 4.6 [1]	Floorplate Thickness	Flange Thickness: Standard	Flange Thickness: With Ferrule [2]			Hole Ø	Dimensions: Countersunk Ø for Bolt		Dimensions: Countersunk Depth for Bolt		Tightening Torque	Hexagon Key
	Z	t	-	10	20	30	d	BZP D	HDG D	BZP t1	HDG t1		
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	Nm	mm
FF08	M8	4.5 - 12	3 - 15	13-25	23-35	33-45	9	17	-	4	-	11	5
FF10	M10	5 - 12	3 - 15	13-25	23-35	33-45	11	21	19	5	4	22	6
FF12	M12	6 - 12	3 - 15	13-25	23-35	33-45	13.5	25	23	5.8	4.8	22	8

1) Hot dip galvanised M10 and M12 versions are supplied with a slotted countersunk screw.
2) To order FloorFast with a ferrule, simply add ferrule size to product code.

How to install...

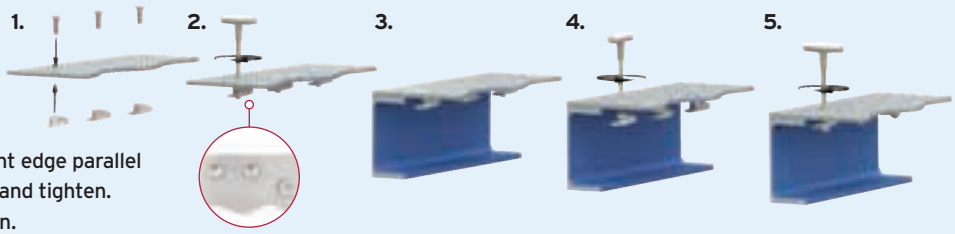

1) Assemble bolt and FloorFast through the chequer plate.
2) Align castings with the straight edge parallel to the edge of the plate and hand tighten.
3) Lay the floorplate into position.
4) Using a hexagon key release countersunk screw one full turn.
5) Tighten down the countersunk socket screw.

Watch the installation video at www.Lindapter.com

Removal: Using a hexagon key, give the FloorFast one full anti-clockwise turn to release the connection from the flange.