

Type TR60


Designed for the TR60+ and TR80+ profiles manufactured by Structural Metal Decks (SMD).



Wedge




Locking Plate



Locking Plate: Pre-galvanised strip.
Wedge: Malleable iron, bright zinc plated.


Product Code	Rod min 4.6	Safe Working Load (3:1 FOS) Tensile / 1 Rod kN	Tightening Torque Nm
TR6006	M6	1.0	10
TR6008	M8	1.0	10
TR6010	M10	1.0	10

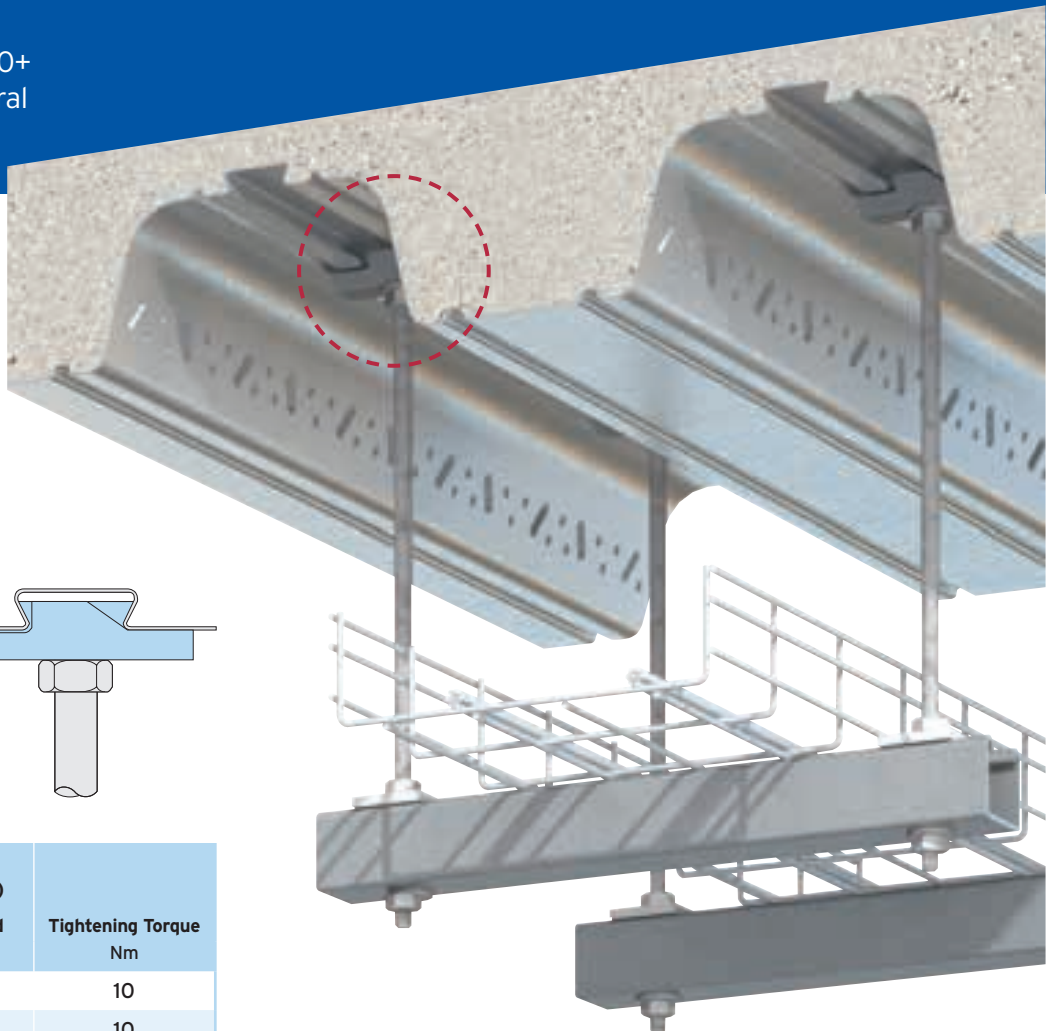

How to install...



Watch the installation video
at www.Lindapter.com

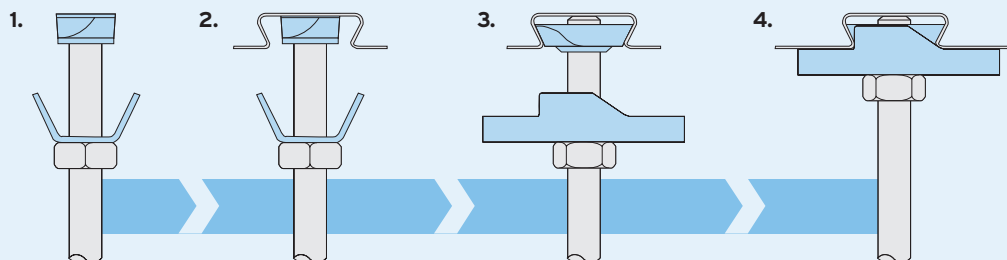

- 1) Pre-assemble the locking plate and wedge (flat surface up) onto the threaded rod.
- 2) Insert the wedge into the re-entrant channel of the decking.
- 3) Rotate until the chamfered cams engage on the sides of the channel.
- 4) Slide the plate up the threaded rod and over the wedge to lock it into position. Tighten the locknut beneath the plate to hold the assembly in position.

- Install the decking fixings after the concrete has been poured and has reached full strength.
- If the decking profile is deformed or distorted, do not install the fixing. If in doubt, contact the Technical Support team for advice.