
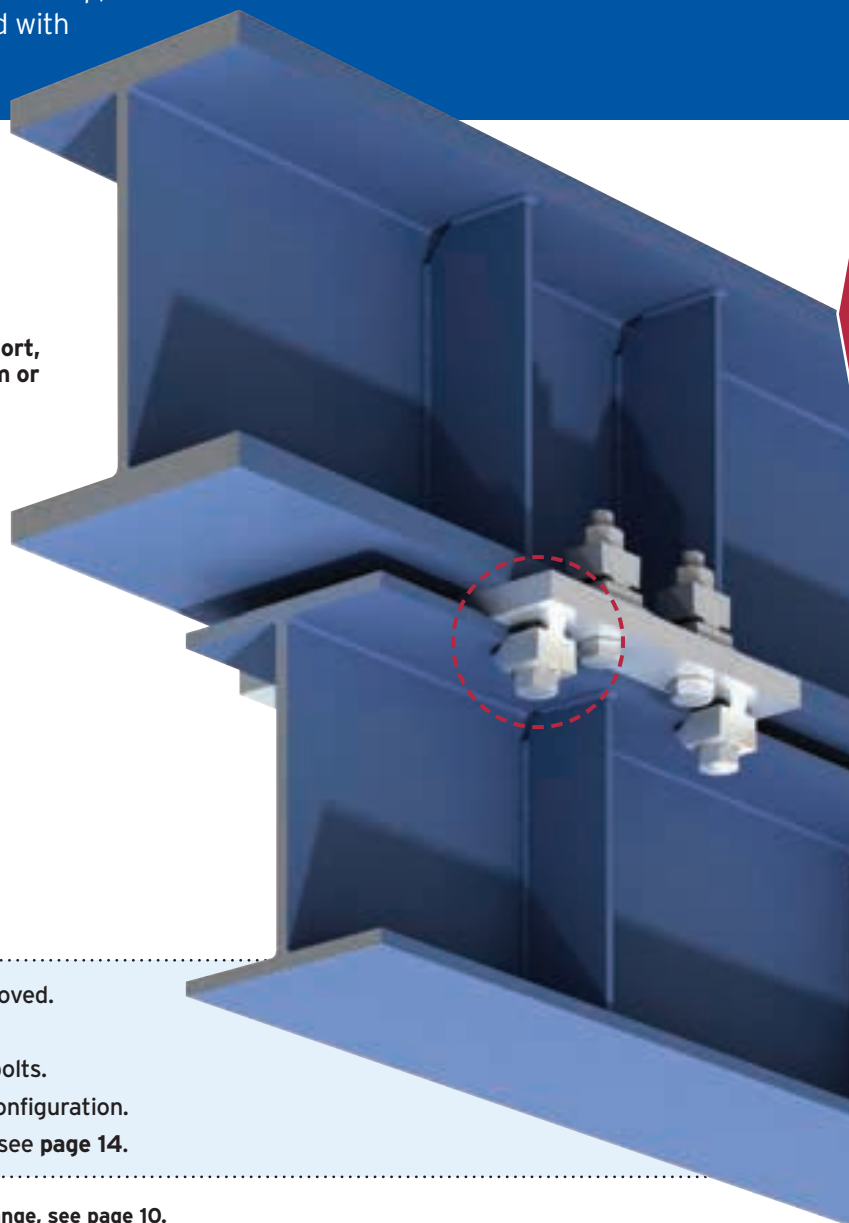
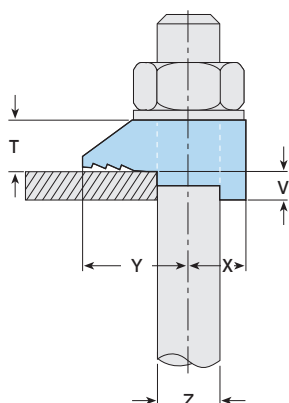


Type B

The flat-top version of Lindapter's standard clamp, for moderate tensile loading. Can also be used with Type A in a Girder Clamp configuration.

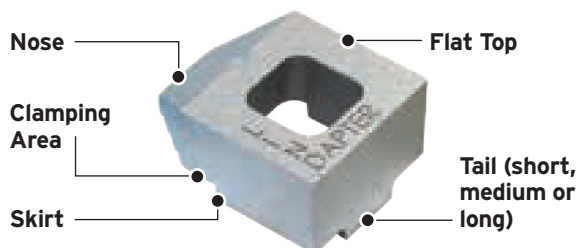

- CE Mark, DIBt, Lloyd's Register and TÜV approved.
- Flat top allows the bolt head or nut to rotate.
- Suitable for use with bolts, studs, tie rods, J-bolts.
- Supports up to 78.8kN in a tensile four bolt configuration.
- For higher loads the Type AF should be used, see [page 14](#).

- Packings are available to increase the clamping range, see [page 10](#).
- Location plate / end plate details can be found on [page 11](#).

Material: Malleable iron, zinc plated / hot dip galvanised.



Product Code	Bolt 8.8 Z	Safe Working Loads (5:1 FOS)		Tightening Torque	Dimensions						
		Tensile / 1 Bolt	Slip Resistance / 2 Bolts		Y	X	Tail Length V			T	Width
		kN	kN		Nm	mm	mm	short mm	medium mm	long mm	mm
B08	M8	1.0	-	6	16	8	-	4	-	8	20
B10	M10	1.5	-	20	20	11	4	5	7	10	26
B12	M12	5.8	0.7	69	26	13	4.5	6	9.5	12	29
B16	M16	7.3	1.5	147	30	16	5.5	8	11	16	36
B20	M20	14.7	3.0	285	36	19	7	10	12.5	20	46
B24	M24	19.7	4.5	491	48	25	9	12	16	24	55



For Characteristic Resistances when designing a connection to Eurocode 3 (ETA 13/0300, DOP 0003), please contact Lindapter.