
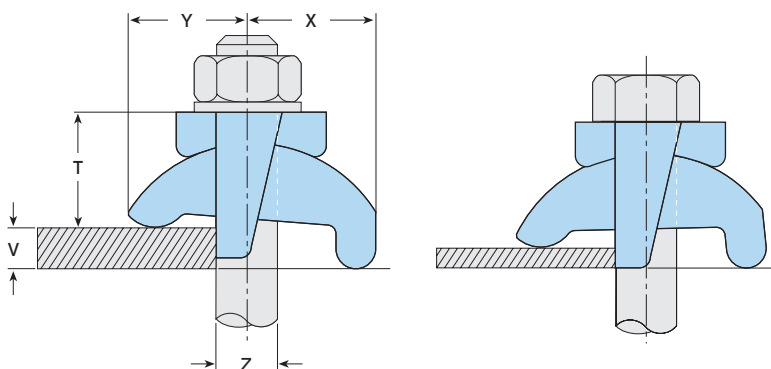
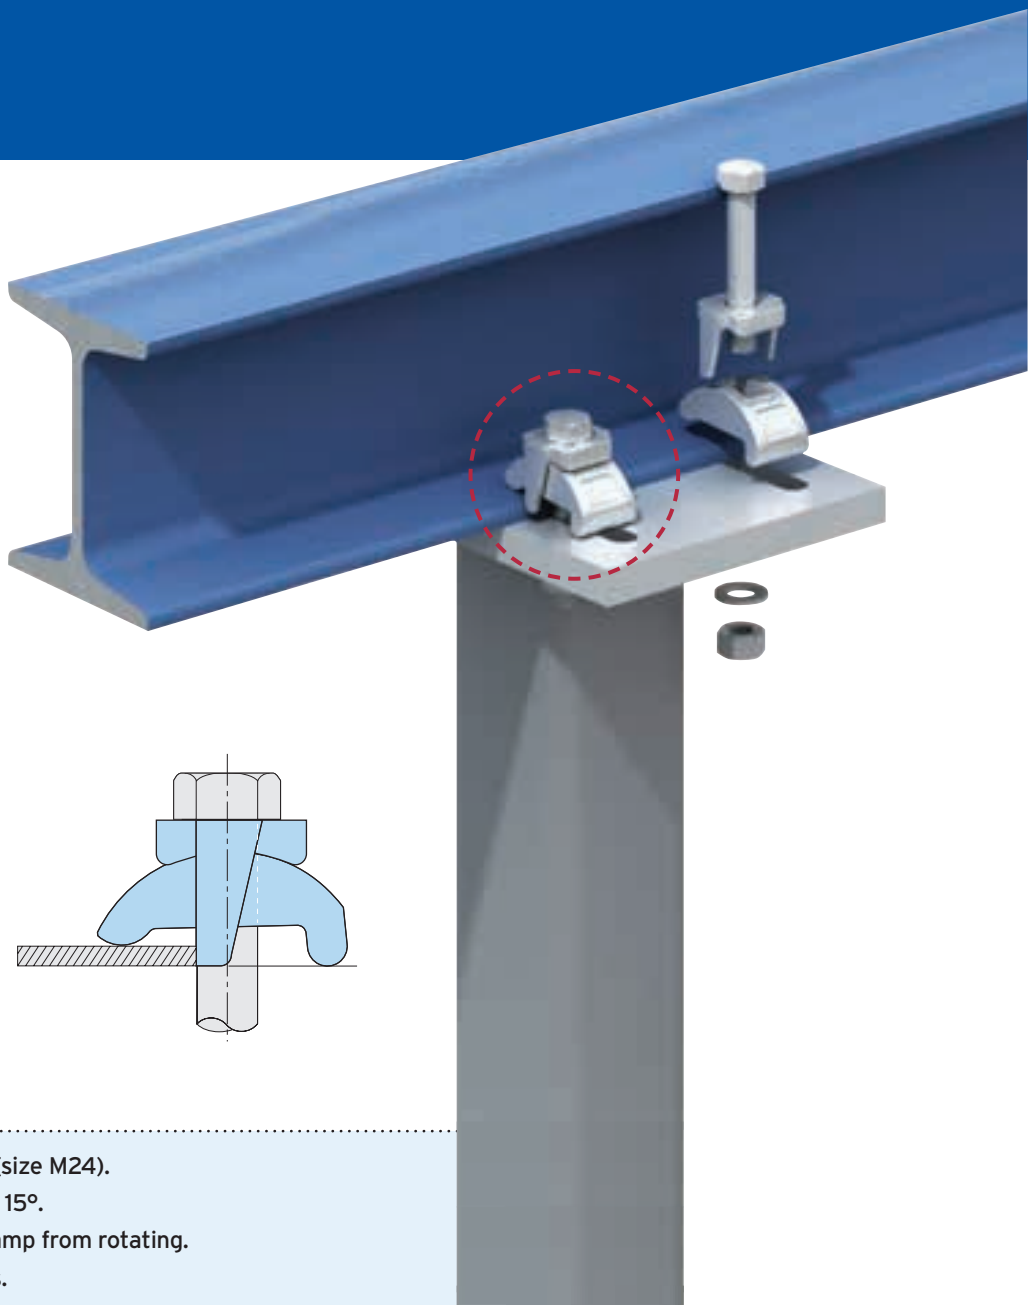


Type LR

A versatile, self-adjusting clamp designed to suit a range of flange thicknesses.

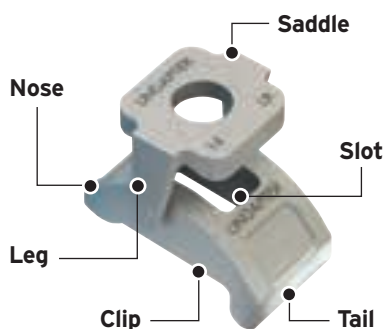

- Clamping ranges from 3mm - 24mm (size M24).
- For parallel and tapered flanges up to 15°.
- The leg of the saddle prevents the clamp from rotating.
- The tail spans slotted clearance holes.

➤ Packings are available to increase the clamping range, see page 20.

➤ Location plate / end plate details can be found on page 21.

Material: Malleable iron, zinc plated / hot dip galvanised.



Product Code	Bolt 8.8 Z	Safe Working Loads (Factor of Safety 5:1)		Tightening Torque Nm	Clamping Range V mm	Dimensions			
		Tensile / 1 Bolt kN	Slip Resistance / 2 Bolts kN			Y mm	X mm	T mm	Width with Saddle mm
LR10	M10	1.5	-	20	3 - 10	21 - 24	24 - 26	21 - 24	33
LR12	M12	5.8	0.7	69	3 - 12	26 - 29	25 - 31	25 - 29	39
LR16	M16	7.3	1.5	147	3 - 16	30 - 35	34 - 37	30 - 36	46
LR20	M20	14.7	3.0	285	3 - 20	42 - 49	46 - 51	41 - 48	57
LR24	M24	19.7	4.5	491	3 - 24	47 - 57	52 - 58	44 - 54	76