
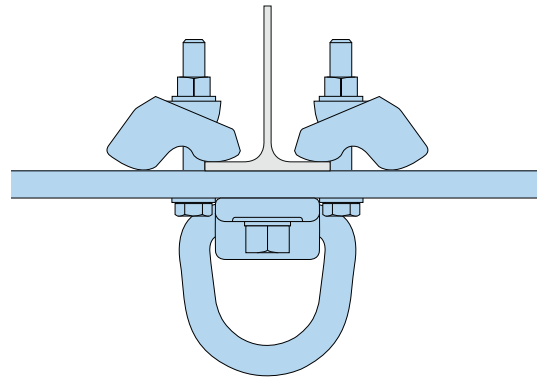
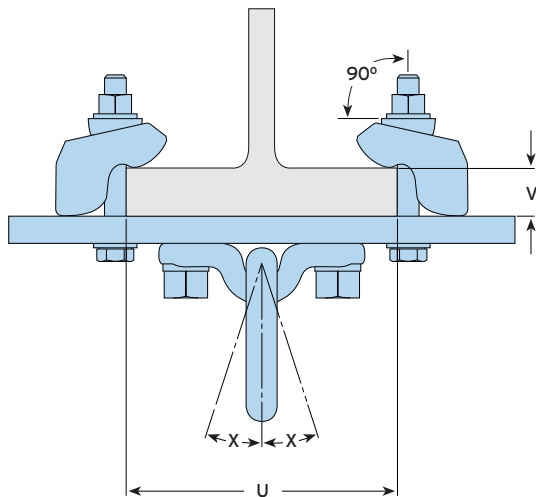


Type ALP

Lindapter's standard rigging and lifting solution adjusts to suit the beam width, flange thickness and orientation of the lift. Safely supports loads up to three metric tonnes.

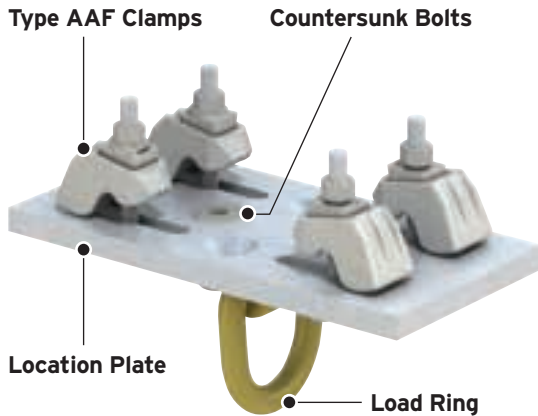

- Available 'off-the-shelf' with a safe working load up to 3t (29.4kN).
- Large load ring can be set to suit the lift orientation.
- Adjusts to suit the 5mm to 26mm flange thickness and 70mm to 210mm beam widths.
- Suitable for parallel and tapered beams up to 10°.

- Ensure that the supporting steelwork is suitable for the applied load.
- For larger steel sections or heavier loads, please refer to the Type LP (page 37), Lindapter's bespoke Lifting Points manufactured to suit individual applications.

Material: Type AAF clamps (low temperature SG iron, hot dip galvanised), Location Plate (mild steel, hot dip galvanised) and Load Ring (forged steel, painted).

Product Code	Torque Figures				Clamping Range		Safe Working Loads (4:1 Factor of Safety)	Max. angle of load X
	Load Ring Countersunk Bolts		Type AAF Bolts		Flange Thickness V	Beam Width U		
	Bolt 10.9	Torque Nm	Bolt 8.8	Torque Nm	mm	mm		
ALP 3T-1	M16	100	M12	90	5 - 26	70 - 210	3t (29.4kN)	18°